






MANDRINI A CALETTAMENTO

MANDRINI A CALETTAMENTO ISO 40 DIN 69871 AD/B

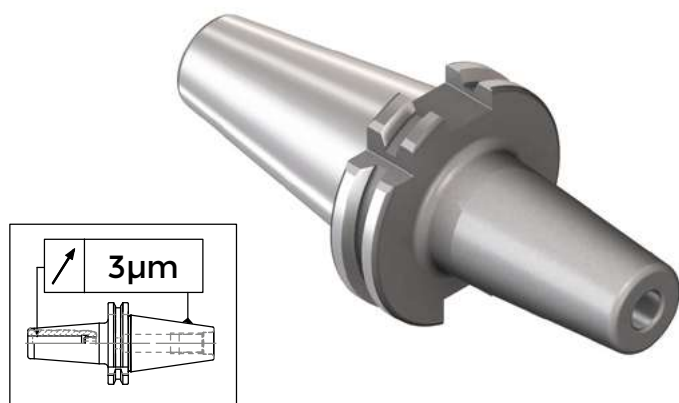

H= 0 > 100 mm - 3 μm
H= 100 > 200 mm - 5 μm

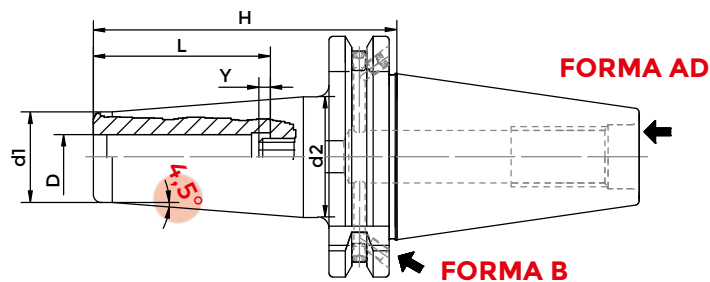


DIN 69871 AD/B


4,5° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-11232	TC40H80K03-HTT	40	3	80	22	10	9	16	•
251-11225	TC40H80K04-HTT	40	4	80	26	10	10	17	•
251-11233	TC40H80K05-HTT	40	5	80	30	10	11	18	•
251-11201	TC40H80K06-HTT	40	6	80	36	10	21	27	•
251-11202	TC40H80K08-HTT	40	8	80	36	10	21	27	•
251-11203	TC40H80K10-HTT	40	10	80	42	10	24	32	•
251-11204	TC40H80K12-HTT	40	12	80	47	10	24	32	•
251-11206	TC40H80K14-HTT	40	14	80	47	10	27	34	•
251-11205	TC40H80K16-HTT	40	16	80	50	10	27	34	•
251-11207	TC40H80K18-HTT	40	18	80	50	10	33	42	•
251-11208	TC40H80K20-HTT	40	20	80	52	10	33	42	•
251-11218	TC40H100K25-HTT	40	25	100	58	10	44	53	•
251-11295	TC40H120K03-HTT	40	3	120	22	10	9	16	•
251-11296	TC40H120K04-HTT	40	4	120	26	10	10	17	•
251-11297	TC40H120K05-HTT	40	5	120	30	10	11	18	•
251-11209	TC40H120K06-HTT	40	6	120	36	10	21	27	•
251-11210	TC40H120K08-HTT	40	8	120	36	10	21	27	•
251-11211	TC40H120K10-HTT	40	10	120	42	10	24	32	•
251-11212	TC40H120K12-HTT	40	12	120	47	10	24	32	•
251-11298	TC40H120K16-HTT	40	16	120	50	10	27	34	•

MANDRINI A CALETTAMENTO ISO 40 DIN 69871 AD/B



H= 0 > 100 mm - 3 μm
 H= 100 > 200 mm - 5 μm

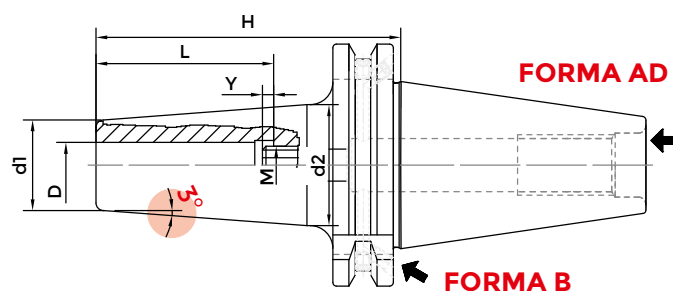


DIN69871 AD/B


3° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-21284	TC40H80K03-HTT	40	3	80	22	10	9	15	•
251-21285	TC40H80K04-HTT	40	4	80	26	10	10	16	•
251-21287	TC40H80K06-HTT	40	6	80	30	10	12	18	•
251-21288	TC40H80K08-HTT	40	8	80	36	10	14	20	•
251-21289	TC40H80K10-HTT	40	10	80	41	10	16	22	•
251-21290	TC40H80K12-HTT	40	12	80	47	10	18	24	•
251-21292	TC40H80K16-HTT	40	16	80	50	10	24	30	•
251-21295	TC40H120K03-HTT	40	3	120	22	-	9	19	•
251-21296	TC40H120K04-HTT	40	4	120	26	-	10	20	•
251-21298	TC40H120K06-HTT	40	6	120	30	10	12	22	•
251-21299	TC40H120K08-HTT	40	8	120	36	10	14	24	•
251-31201	TC40H120K10-HTT	40	10	120	42	10	16	26	•
251-31202	TC40H120K12-HTT	40	12	120	47	10	18	28	•
251-31204	TC40H120K16-HTT	40	16	120	47	10	24	34	•
251-31207	TC40H160K03-HTT	40	3	160	22	-	9	23	•
251-31208	TC40H160K04-HTT	40	4	160	26	-	10	24	•
251-31210	TC40H160K06-HTT	40	6	160	30	10	12	26	•
251-31211	TC40H160K08-HTT	40	8	160	36	10	14	28	•
251-31212	TC40H160K10-HTT	40	10	160	42	10	16	30	•
251-31213	TC40H160K12-HTT	40	12	160	47	10	18	32	•
251-31215	TC40H160K16-HTT	40	16	160	50	10	24	38	•
251-31217	TC40H160K20-HTT	40	20	160	52	10	26	38	•

MANDRINI A CALETTAMENTO CON LUBRIFICAZIONE PERIFERICA ISO 40 DIN 69871 AD/B

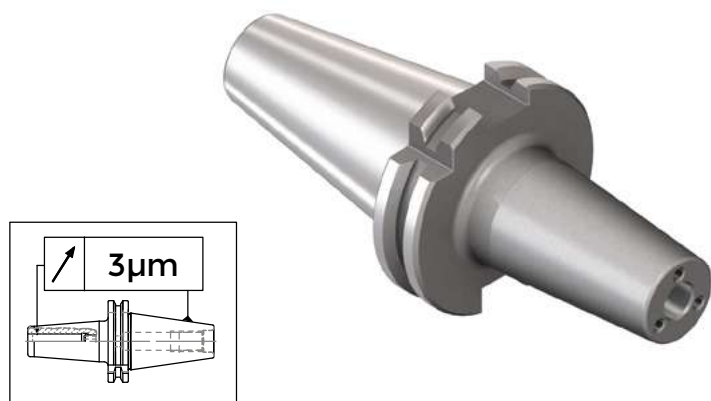

H = 0 > 100 mm - 3 μm
 H = 100 > 200 mm - 5 μm


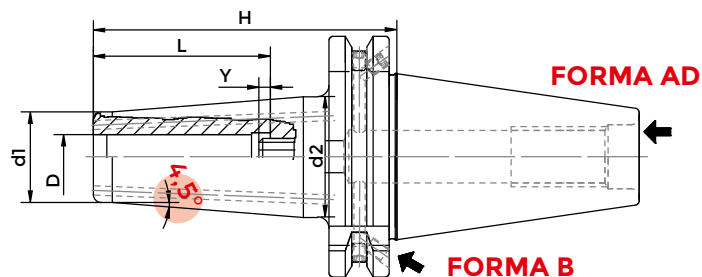


DIN69871 AD/B


4,5° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-31221	TC40H80K06-HTT I.C.	40	6	80	36	10	21	27	•
251-31222	TC40H80K08-HTT I.C.	40	8	80	36	10	21	27	•
251-31223	TC40H80K10-HTT I.C.	40	10	80	42	10	24	32	•
251-31224	TC40H80K12-HTT I.C.	40	12	80	47	10	24	32	•
251-31225	TC40H80K14-HTT I.C.	40	14	80	47	10	27	34	•
251-31226	TC40H80K16-HTT I.C.	40	16	80	50	10	27	34	•
251-31227	TC40H80K18-HTT I.C.	40	18	80	50	10	33	42	•
251-31228	TC40H80K20-HTT I.C.	40	20	80	52	10	33	42	•
251-31229	TC40H100K25-HTT I.C.	40	25	100	58	10	44	53	•
251-31230	TC40H100K32-HTT I.C.	40	32	100	63	10	44	53	•
251-31231	TC40H120K06-HTT I.C.	40	6	120	36	10	21	27	•
251-31232	TC40H120K08-HTT I.C.	40	8	120	36	10	21	27	•
251-31233	TC40H120K10-HTT I.C.	40	10	120	42	10	24	32	•
251-31234	TC40H120K12-HTT I.C.	40	12	120	47	10	24	32	•
251-31235	TC40H120K14-HTT I.C.	40	14	120	47	10	27	34	•
251-31236	TC40H120K16-HTT I.C.	40	16	120	50	10	27	34	•
251-31237	TC40H120K18-HTT I.C.	40	18	120	50	10	33	42	•
251-31238	TC40H120K20-HTT I.C.	40	20	120	52	10	33	42	•

MANDRINI A CALETTAMENTO CON LUBRIFICAZIONE PERIFERICA ISO 50 DIN 69871 AD/B

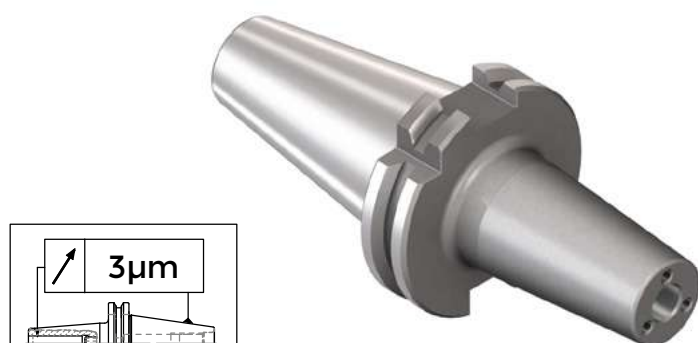

H= 0 > 100 mm - 3 μm
H= 100 > 200 mm - 5 μm

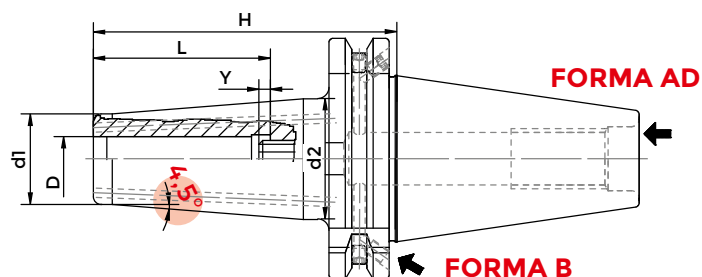


DIN69871 AD/B


4,5° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-21252	TC50H80K04-HTT	50	4	80	-	-	10	19	•
251-11234	TC50H80K06-HTT	50	6	80	36	10	21	27	•
251-11235	TC50H80K08-HTT	50	8	80	36	10	21	27	•
251-11236	TC50H80K10-HTT	50	10	80	42	10	24	32	•
251-11237	TC50H80K12-HTT	50	12	80	47	10	24	32	•
251-11224	TC50H80K16-HTT	50	16	80	50	10	27	34	•
251-11242	TC50H120K06-HTT	50	6	120	36	10	21	27	•
251-11243	TC50H120K08-HTT	50	8	120	36	10	21	27	•
251-11244	TC50H120K10-HTT	50	10	120	42	10	24	32	•
251-11245	TC50H120K12-HTT	50	12	120	47	10	24	32	•
251-11247	TC50H120K16-HTT	50	16	120	50	10	27	34	•
251-11249	TC50H120K20-HTT	50	20	120	52	10	33	42	•
251-21263	TC50H160K06-HTT	50	6	160	36	10	21	27	•
251-21264	TC50H160K08-HTT	50	8	160	36	10	21	27	•
251-21265	TC50H160K10-HTT	50	10	160	42	10	24	32	•
251-21266	TC50H160K12-HTT	50	12	160	47	10	24	32	•
251-21268	TC50H160K16-HTT	50	16	160	50	10	27	34	•
251-21270	TC50H160K20-HTT	50	20	160	52	10	33	42	•

MANDRINI A CALETTAMENTO MAS BT40 TIPO AD/B



H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

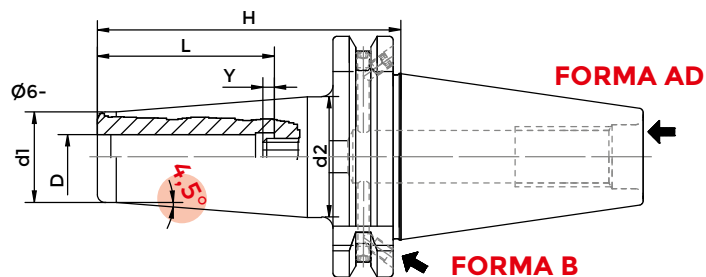


JIS-B 6499 MAS 403 BT-AD/B


4,5° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-11580	BT40H90K03DK-HTT	40	3	90	22	10	9	16	•
251-11581	BT40H90K04DK-HTT	40	4	90	26	10	10	17	•
251-11501	BT40H90K06DK-HTT	40	6	90	37	10	21	27	•
251-11502	BT40H90K08DK-HTT	40	8	90	37	10	21	27	•
251-11503	BT40H90K10DK-HTT	40	10	90	41	10	24	32	•
251-11504	BT40H90K12DK-HTT	40	12	90	47	10	24	32	•
251-11506	BT40H90K16DK-HTT	40	16	90	50	10	27	34	•
251-11508	BT40H90K20DK-HTT	40	20	90	52	10	33	42	•

MANDRINI A CALETTAMENTO MAS BT40 TIPO AD/B



H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

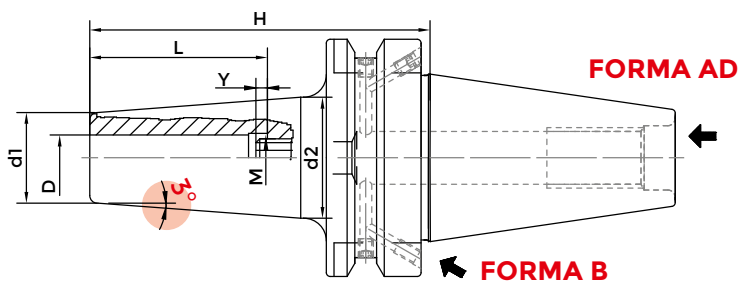


JIS-B 6339 MAS 403 BT-AD/B


3° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d1	d2	G2,5 25000
251-21557	BT40H120K03-HTT	40	3	120	12	-	9	16	•
251-21558	BT40H120K04-HTT	40	4	120	16	-	10	17	•
251-21560	BT40H120K06-HTT	40	6	120	37	10	12	21	•
251-21561	BT40H120K08-HTT	40	8	120	37	10	14	23	•
251-21562	BT40H120K10-HTT	40	10	120	41	10	16	25	•
251-21563	BT40H120K12-HTT	40	12	120	47	10	18	27	•
251-21565	BT40H120K16-HTT	40	16	120	50	10	22	31	•
251-21567	BT40H120K20-HTT	40	20	120	52	10	26	35	•

MANDRINI A CALETTAMENTO DOPPIO CONTATTO CON LUBRIFICAZIONE PERIFERICA MAS BT40 TIPO AD



H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

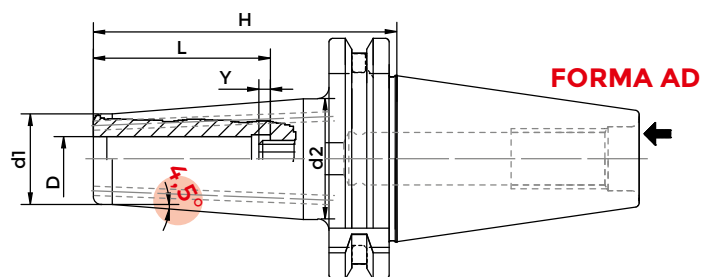


JIS-B 6499 MAS 403 BT-AD - MAS BT AD


4,5° PROGRAMMA

COD.	DESCRIZIONE	ISO	D	H	L	Y max	d	d1	G2,5 25000
251-21595	BT40H90K06DK-HTT.-I.C.	40	6	90	37	10	21	27	•
251-21596	BT40H90K08DK-HTT.-I.C.	40	8	90	37	10	21	27	•
251-21597	BT40H90K10DK-HTT.-I.C.	40	10	90	41	10	24	32	•
251-21598	BT40H90K12DK-HTT.-I.C.	40	12	90	47	10	24	32	•
251-21599	BT40H90K16DK-HTT.-I.C.	40	16	90	50	10	27	34	•
251-21603	BT40H120K06DK-HTT.-I.C.	40	6	120	37	10	21	27	•
251-21604	BT40H120K08DK-HTT.-I.C.	40	8	120	37	10	21	27	•
251-21605	BT40H120K10DK-HTT.-I.C.	40	10	120	41	10	24	32	•
251-21606	BT40H120K12DK-HTT.-I.C.	40	12	120	47	10	24	32	•
251-21607	BT40H120K16DK-HTT.-I.C.	40	16	120	50	10	27	34	•

MANDRINI A CALETTAMENTO HSK 63 DIN 69893 TIPO A

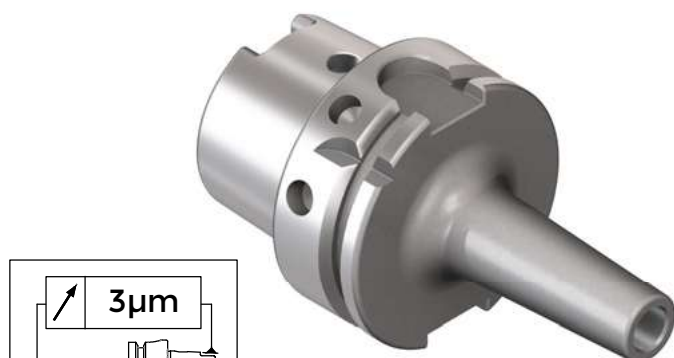

H= 0 > 100 mm - 3 µm
 H= 100 > 200 mm - 5 µm


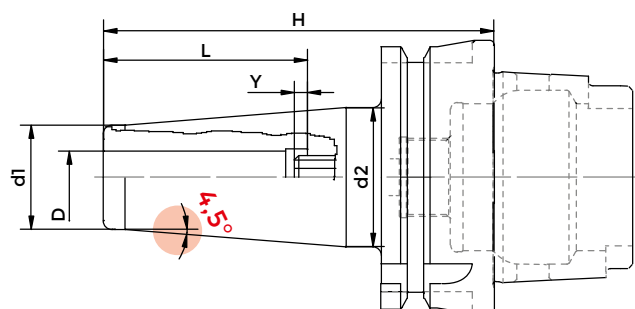


DIN 69893 - HSK 63A


4,5° PROGRAMMA

COD.	DESCRIZIONE	HSK	D	H	L	Y max	d1	d2	G2,5 25000
251-21725	HSK63AH80K03-HTT	63	3	80	14	10	9	16	•
251-21726	HSK63AH80K04-HTT	63	4	80	18	10	10	17	•
251-21727	HSK63AH80K05-HTT	63	5	80	22	10	11	18	•
251-21728	HSK63AH80K06-HTT	63	6	80	36	10	21	27	•
251-21729	HSK63AH80K08-HTT	63	8	80	36	10	21	27	•
251-21730	HSK63AH85K10-HTT	63	10	85	42	10	24	32	•
251-11710	HSK63AH90K12-HTT	63	12	90	47	10	24	32	•
251-11711	HSK63AH90K14-HTT	63	14	90	47	10	27	34	•
251-11712	HSK63AH95K16-HTT	63	16	95	50	10	27	34	•
251-11714	HSK63AH100K20-HTT	63	20	100	52	10	33	42	•
251-21731	HSK63AH115K25-HTT	63	25	115	58	10	44	53	•
251-21782	HSK63AH120K32-HTT	63	32	120	62	10	44	53	•
251-21732	HSK63AH120K03-HTT	63	3	120	22	10	9	16	•
251-21733	HSK63AH120K04-HTT	63	4	120	26	10	10	17	•
251-11725	HSK63AH120K06-HTT	63	6	120	36	10	21	27	•
251-11726	HSK63AH120K08-HTT	63	8	120	36	10	21	27	•
251-11727	HSK63AH120K10-HTT	63	10	120	42	10	24	32	•
251-11728	HSK63AH120K12-HTT	63	12	120	47	10	24	32	•
251-11730	HSK63AH120K16-HTT	63	16	120	50	10	27	34	•
251-21784	HSK63AH120K20-HTT	63	20	120	52	10	33	42	•
251-21786	HSK63AH160K03-HTT	63	3	160	22	10	9	22	•
251-21787	HSK63AH160K04-HTT	63	4	160	26	10	10	22	•
251-21788	HSK63AH160K05-HTT	63	5	160	30	10	11	22	•
251-21789	HSK63AH160K06-HTT	63	6	160	36	10	21	27	•
251-21790	HSK63AH160K08-HTT	63	8	160	36	10	21	27	•
251-21791	HSK63AH160K10-HTT	63	10	160	42	10	24	32	•
251-21792	HSK63AH160K12-HTT	63	12	160	47	10	24	32	•
251-21794	HSK63AH160K16-HTT	63	16	160	50	10	27	34	•
251-21796	HSK63AH160K20-HTT	63	20	160	52	10	33	42	•
251-21797	HSK63AH160K25-HTT	63	25	160	63	10	44	53	•
251-21798	HSK63AH160K32-HTT	63	32	160	63	10	44	53	•

MANDRINI A CALETTAMENTO CON LUBRIFICAZIONE PERIFERICA HSK 63 DIN 69893 TIPO A

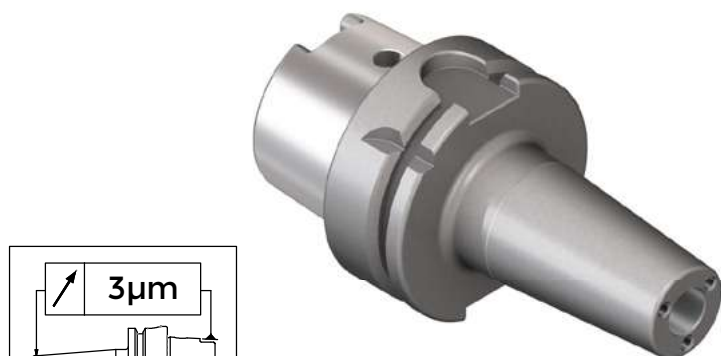

H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm


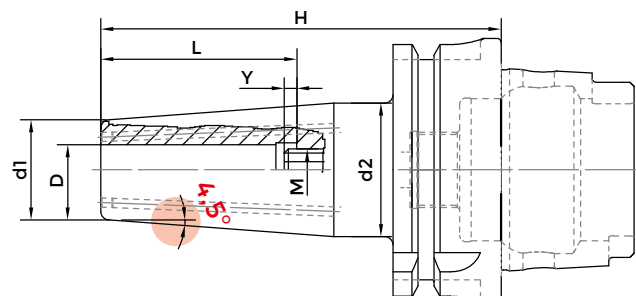


DIN 69893A


4,5° PROGRAMMA

COD.	DESCRIZIONE	HSK	D	H	L	Y max	d1	d2	G2,5 25000
251-31763	HSK63AH80K06-HTT-L	63	6	80	36	10	21	27	•
251-31764	HSK63AH80K08-HTT-L	63	8	80	36	10	21	27	•
251-31765	HSK63AH85K10-HTT-L	63	10	85	42	10	24	32	•
251-31766	HSK63AH90K12-HTT-L	63	12	90	47	10	24	32	•
251-31767	HSK63AH90K14-HTT-L	63	14	90	47	10	27	34	•
251-31768	HSK63AH95K16-HTT-L	63	16	95	50	10	27	34	•
251-31770	HSK63AH100K20-HTT-L	63	20	100	52	10	33	42	•
251-31773	HSK63AH120K06-HTT-I.C.	63	6	120	36	10	21	27	•
251-31774	HSK63AH120K08-HTT-I.C.	63	8	120	36	10	21	27	•
251-31775	HSK63AH120K10-HTT-I.C.	63	10	120	42	10	24	32	•
251-31776	HSK63AH120K12-HTT-I.C.	63	12	120	47	10	24	32	•
251-31777	HSK63AH120K14-HTT-I.C.	63	14	120	47	10	27	34	•
251-31778	HSK63AH120K16-HTT-I.C.	63	16	120	50	10	27	34	•
251-31779	HSK63AH120K20-HTT-I.C.	63	20	120	52	10	33	42	•
251-31780	HSK63AH160K06-HTT-I.C.	63	6	160	36	10	21	33,5	•
251-31781	HSK63AH160K08-HTT-I.C.	63	8	160	36	10	21	33,5	•
251-31782	HSK63AH160K10-HTT-I.C.	63	10	160	42	10	24	37,5	•
251-31783	HSK63AH160K12-HTT-I.C.	63	12	160	47	10	24	37,5	•
251-31784	HSK63AH160K14-HTT-I.C.	63	14	160	47	10	27	40	•
251-31785	HSK63AH160K16-HTT-I.C.	63	16	160	47	10	27	43	•
251-31786	HSK63AH160K18-HTT-I.C.	63	18	160	50	10	33	47	•
251-31787	HSK63AH160K20-HTT-I.C.	63	20	160	50	10	33	50	•
251-31788	HSK63AH160K25-HTT-I.C.	63	25	160	58	10	44	53	•
251-31789	HSK63AH160K32-HTT-I.C.	63	32	160	63	10	44	53	•

MANDRINI A CALETTAMENTO HSK 63 DIN 69893 TIPO A

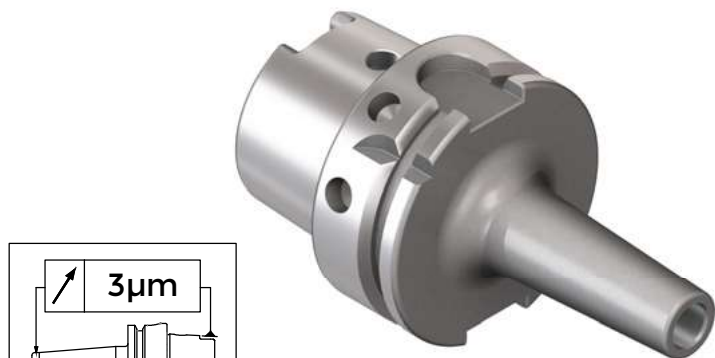

H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

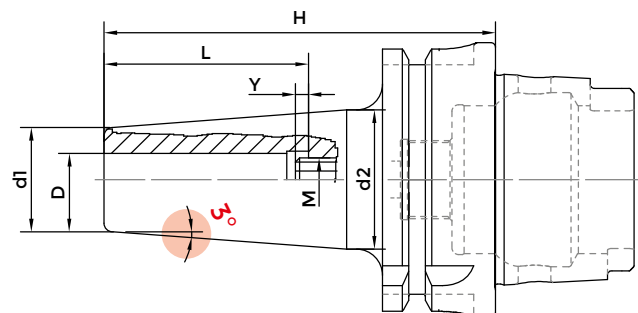


DIN 69893A


3° PROGRAMMA

COD.	DESCRIZIONE	HSK	D	H	L	Y max	d1	d2	G2,5 25000
251-31711	HSK63AH80K03-HTT	63	3	80	28	-	9	14	•
251-31712	HSK63AH80K04-HTT	63	4	80	28	-	10	15	•
251-31714	HSK63AH80K06-HTT	63	6	80	36	10	12	17	•
251-31715	HSK63AH80K08-HTT	63	8	80	36	10	14	19	•
251-31716	HSK63AH85K10-HTT	63	10	85	42	10	16	21	•
251-31717	HSK63AH90K12-HTT	63	12	90	47	10	18	24	•
251-31719	HSK63AH95K16-HTT	63	16	95	47	10	24	30	•
251-31721	HSK63AH100K20-HTT	63	20	100	52	10	26	32	•
251-31722	HSK63AH120K03-HTT	63	3	120	28	-	9	18	•
251-31723	HSK63AH120K04-HTT	63	4	120	28	-	10	19	•
251-31725	HSK63AH120K06-HTT	63	6	120	36	10	12	21	•
251-31726	HSK63AH120K08-HTT	63	8	120	36	10	14	23	•
251-31727	HSK63AH120K10-HTT	63	10	120	42	10	16	25	•
251-31728	HSK63AH120K12-HTT	63	12	120	47	10	18	27	•
251-31730	HSK63AH120K16-HTT	63	16	120	47	10	24	33	•
251-31732	HSK63AH120K20-HTT	63	20	120	52	10	26	35	•
251-31733	HSK63AH160K03-HTT	63	3	160	28	-	9	22	•
251-31734	HSK63AH160K04-HTT	63	4	160	28	-	10	23	•
251-31736	HSK63AH160K06-HTT	63	6	160	36	10	12	25	•
251-31737	HSK63AH160K08-HTT	63	8	160	36	10	14	27	•
251-31738	HSK63AH160K10-HTT	63	10	160	42	10	16	29	•
251-31739	HSK63AH160K12-HTT	63	12	160	47	10	18	31	•
251-31741	HSK63AH160K16-HTT	63	16	160	47	10	24	37	•
251-31742	HSK63AH160K18-HTT	63	18	160	50	10	24	36	•
251-31743	HSK63AH160K20-HTT	63	20	160	52	10	26	38	•

MANDRINI A CALETTAMENTO HSK 63 DIN 69893 TIPO A



H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

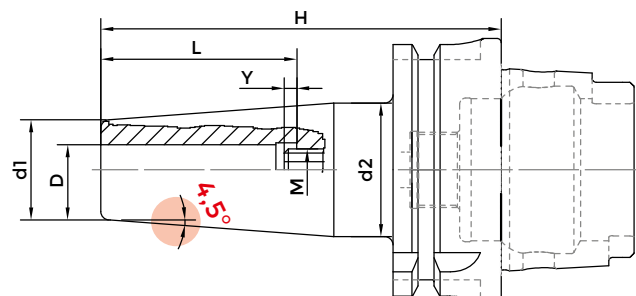


DIN 69893A


4,5° PROGRAMMA

COD.	DESCRIZIONE	HSK	D	H	L	d1	d2	G2,5 25000
251-21735	HSK100AH85K06-HTT	100	6	85	36	21	27	•
251-21736	HSK100AH85K08-HTT	100	8	85	36	21	27	•
251-21737	HSK100AH90K10-HTT	100	10	90	42	24	32	•
251-21738	HSK100AH95K12-HTT	100	12	95	47	24	32	•
251-21739	HSK100AH95K14-HTT	100	14	95	47	27	34	•
251-21740	HSK100AH100K16-HTT	100	16	100	50	27	34	•
251-21742	HSK100AH100K20-HTT	100	20	100	52	33	42	•
251-21743	HSK100AH115K25-HTT	100	25	115	58	44	53	•
251-21799	HSK100AH120K32-HTT	100	32	120	63	44	53	•
251-21744	HSK100AH130K06-HTT	100	6	130	36	21	27	•
251-21745	HSK100AH130K08-HTT	100	8	130	36	21	27	•
251-21746	HSK100AH130K10-HTT	100	10	130	42	24	32	•
251-21747	HSK100AH130K12-HTT	100	12	130	47	24	32	•
251-21748	HSK100AH130K14-HTT	100	14	130	47	27	34	•
251-21749	HSK100AH130K16-HTT	100	16	130	50	27	34	•
251-21751	HSK100AH130K20-HTT	100	20	130	52	33	42	•

MANDRINI A CALETTAMENTO CON LUBRIFICAZIONE PERIFERICA CAPTO DIN 26623-1



H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

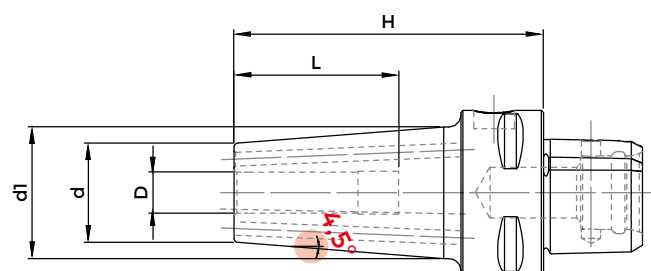


DIN ISO 26623-1

4,5° PROGRAMMA


COD.	DESCRIZIONE	POLIGONALE	D	H	L	d	d1	G2.5 25000
251-17621	C40H75K06-HTT- I.C.	C 40	6	75	36	20	27	•
251-17623	C40H75K08-HTT- I.C.	C 40	8	75	36	20	27	•
251-17625	C40H75K10-HTT- I.C.	C 40	10	75	42	24	32	•
251-17627	C40H75K12-HTT- I.C.	C 40	12	75	47	24	32	•
251-17622	C40H120K06-HTT- I.C.	C 40	6	120	36	20	27	•
251-17624	C40H120K08-HTT- I.C.	C 40	8	120	36	20	27	•
251-17626	C40H120K10-HTT- I.C.	C 40	10	120	42	24	32	•
251-17628	C40H120K12-HTT- I.C.	C 40	12	120	47	24	32	•
251-17629	C50H75K06-HTT- I.C.	C 50	6	75	36	20	27	•
251-17631	C50H75K08-HTT- I.C.	C 50	8	75	36	20	27	•
251-17633	C50H75K10-HTT- I.C.	C 50	10	75	42	24	32	•
251-17635	C50H75K12-HTT- I.C.	C 50	12	75	47	24	32	•
251-17637	C50H80K16-HTT- I.C.	C 50	16	80	50	27	34	•
251-17639	C50H85K20-HTT- I.C.	C 50	20	85	52	33	42	•
251-17630	C50H120K06-HTT- I.C.	C 50	6	120	36	20	27	•
251-17632	C50H120K08-HTT- I.C.	C 50	8	120	36	20	27	•
251-17634	C50H120K10-HTT- I.C.	C 50	10	120	42	24	32	•
251-17636	C50H120K12-HTT- I.C.	C 50	12	120	47	24	32	•
251-17638	C50H120K16-HTT- I.C.	C 50	16	120	50	27	34	•
251-17640	C50H120K20-HTT- I.C.	C 50	20	120	52	33	42	•
251-17641	C63H80K06-HTT- I.C.	C 63	6	80	36	20	27	•
251-17644	C63H80K08-HTT- I.C.	C 63	8	80	36	20	27	•
251-17647	C63H80K10-HTT- I.C.	C 63	10	80	40	24	32	•
251-17650	C63H80K12-HTT- I.C.	C 63	12	80	47	24	32	•
251-17653	C63H85K16-HTT- I.C.	C 63	16	85	50	27	34	•
251-17656	C63H85K20-HTT- I.C.	C 63	20	85	50	33	42	•
251-17642	C63H120K06-HTT- I.C.	C 63	6	120	36	20	27	•
251-17645	C63H120K08-HTT- I.C.	C 63	8	120	36	20	27	•
251-17648	C63H120K10-HTT- I.C.	C 63	10	120	40	24	32	•
251-17651	C63H120K12-HTT- I.C.	C 63	12	120	47	24	32	•
251-17654	C63H120K16-HTT- I.C.	C 63	16	120	50	27	34	•

segue >>

MANDRINI A CALETTAMENTO CON LUBRIFICAZIONE PERIFERICA CAPTO DIN 26623-1

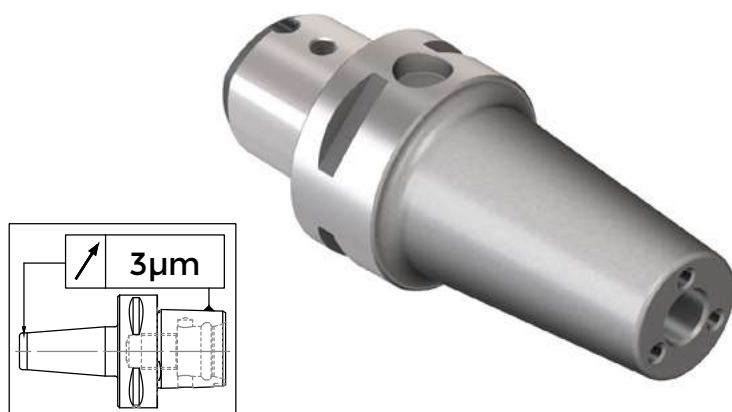

H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

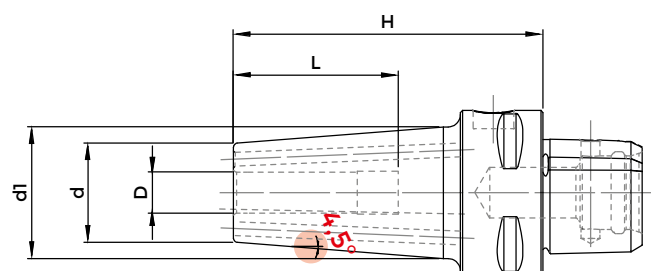


DIN ISO 26623-1

4,5° PROGRAMMA

COD.	DESCRIZIONE	POLIGONALE	D	H	L	d	d1	G2,5 25000
251-17657	C63H120K20-HTT- I.C.	C 63	20	120	50	33	42	•
251-17643	C63H160K06-HTT- I.C.	C 63	6	160	36	20	27	•
251-17646	C63H160K08-HTT- I.C.	C 63	8	160	36	20	27	•
251-17649	C63H160K10-HTT- I.C.	C 63	10	160	40	24	32	•
251-17652	C63H160K12-HTT- I.C.	C 63	12	160	47	24	32	•
251-17655	C63H160K16-HTT- I.C.	C 63	16	160	50	27	34	•
251-17658	C63H160K20-HTT- I.C.	C 63	20	160	50	33	42	•
251-17659	C80H85K06-HTT- I.C.	C 80	6	85	36	20	27	•
251-17661	C80H85K08-HTT- I.C.	C 80	8	85	36	20	27	•
251-17663	C80H85K10-HTT- I.C.	C 80	10	85	42	24	32	•
251-17665	C80H85K12-HTT- I.C.	C 80	12	85	47	24	32	•
251-17667	C80H90K16-HTT- I.C.	C 80	16	90	50	27	34	•
251-17669	C80H90K20-HTT- I.C.	C 80	20	90	52	33	42	•
251-17660	C80H130K06-HTT- I.C.	C 80	6	130	36	20	27	•
251-17662	C80H130K08-HTT- I.C.	C 80	8	130	36	20	27	•
251-17664	C80H130K10-HTT- I.C.	C 80	10	130	42	24	32	•
251-17666	C80H130K12-HTT- I.C.	C 80	12	130	47	24	32	•
251-17668	C80H130K16-HTT- I.C.	C 80	16	130	50	27	34	•
251-17670	C80H130K20-HTT- I.C.	C 80	20	130	52	33	42	•

PROLUNGHE PER CALETTAMENTO

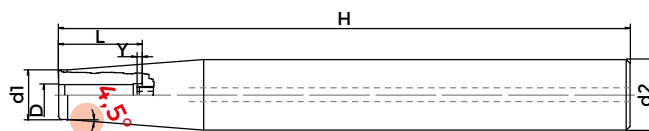

COD.	DESCRIZIONE	D	H	L	Y max	d1	d2
251-15110	D12H150K03-HTT	3	150	-	-	8	12
251-15111	D12H150K04-HTT	4	150	-	-	8	12
251-15133	D12H150K05-HTT	5	150	-	-	10	12
251-15134	D12H150K06-HTT	6	150	36	10	10	12
251-15112	D16H150K03-HTT	3	150	-	-	10	16
251-15113	D16H150K04-HTT	4	150	-	-	10	16
251-15114	D16H150K05-HTT	5	150	-	-	10	16
251-15115	D16H150K06-HTT	6	150	36	10	10	16
251-15139	D16H150K08-HTT	8	150	36	10	12	16
251-15140	D20H150K03-HTT	3	150	-	-	10	20
251-15141	D20H150K04-HTT	4	150	-	-	10	20
251-15117	D20H150K06-HTT	6	150	36	10	10	20
251-15118	D20H150K08-HTT	8	150	36	10	12	20
251-15145	D20H150K10-HTT	10	150	42	10	14	20
251-15146	D20H150K12-HTT	12	150	47	10	16	20
251-15149	D25H150K05-HTT	5	150	-	-	15	25
251-15150	D25H150K06-HTT	6	150	36	10	20	25
251-15120	D25H150K10-HTT	10	150	42	10	20	25
251-15121	D25H150K12-HTT	12	150	47	10	20	25
251-15122	D25H150K14-HTT	14	150	47	10	20	25
251-15123	D25H150K16-HTT	16	150	50	10	22	25